

# SAM





,



# 操作手冊

|     |       |    |
|-----|-------|----|
| 1   | ..... | 5  |
| 1.1 | ..... | 5  |
| 1.2 | ..... | 5  |
| 1.3 | ..... | 5  |
| 1.4 | ..... | 7  |
| 1.5 | ..... | 7  |
| 2   | ..... | 7  |
| 2.1 | ..... | 7  |
| 2.2 | ..... | 7  |
| 2.3 | ..... | 7  |
| 2.4 | ..... | 8  |
| 3   | ..... | 9  |
| 3.1 | ..... | 9  |
| 3.2 | ..... | 9  |
| 3.3 | ..... | 9  |
| 3.4 | ..... | 10 |
| 4   | ..... | 11 |
| 4.1 | ..... | 11 |
| 4.2 | ..... | 11 |
| 4.3 | ..... | 11 |
| 4.4 | ..... | 11 |
| 4.5 | ..... | 12 |
| 4.6 | ..... | 12 |
| 4.7 | ..... | 15 |
| 5   | ..... | 16 |



# 操作手冊

## 1

### 1.1

SAM-285 SAM-440 SAM-700


SAM-440-08 SAM

440

L/min 08



:

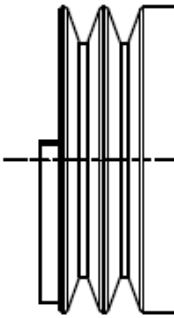

V

DIN7753 PART1 / ISO 4184

ISO 1940-G6.3 VDI2060-Q6.3 ISO 8821







操作手冊

3

3.1

" " 3HP 30HP " "

1

SAM-440


SAM-700



3.2

3.3

2

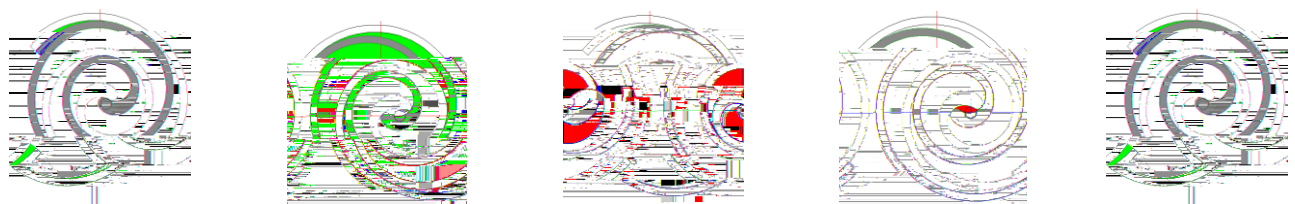

3.4

Oil-free scroll air end technical data

| Model   | Shaft power | Rated pressure | Air displacement | Exhaust interface | Speed | Noise value | Outline size | Weight |
|---------|-------------|----------------|------------------|-------------------|-------|-------------|--------------|--------|
|         | KW          | Mpa            | L/min            | inch              | r/min | dB(A)       | mm           | kg     |
| SAM-285 | 2.2         | 0.8            | 250              | PT3/8"            | 2840  | 64          | 270x300x265  | 15.5   |
|         | 2.4         | 1.0            | 215              |                   | 2400  |             |              |        |
| SAM-440 | 3.75        | 0.8            | 410              | PT1/2"            | 3050  | 65          | 347x330x295  | 19.5   |
|         | 4.4         | 1.0            | 355              |                   | 3000  |             |              |        |
| SAM-700 | 5.5         | 0.8            | 570              | PT3/4"            | 2950  | 66          | 335x381x357  | 31.5   |
|         | 6.0         | 1.0            | 490              |                   | 2650  |             |              |        |



4.

4.1

±



## 4.5



## 4.6



|  |  | 500 | 2500 | 5000 | 10000 | 15000 | 20000 |       |
|--|--|-----|------|------|-------|-------|-------|-------|
|  |  | 2   |      | 2    | 4     | 6     | 8     |       |
|  |  |     |      |      |       |       |       | 3500h |
|  |  |     |      |      |       |       |       |       |
|  |  |     |      |      |       |       |       |       |
|  |  |     |      |      |       |       |       |       |
|  |  |     |      |      |       |       |       |       |
|  |  |     |      |      |       |       |       | 2500h |
|  |  |     |      |      |       |       |       | 6     |
|  |  |     |      |      |       |       |       |       |



|  |  |     |      |      |       |       |       |       |
|--|--|-----|------|------|-------|-------|-------|-------|
|  |  |     |      |      |       |       |       |       |
|  |  | 500 | 2500 | 5000 | 10000 | 15000 | 20000 |       |
|  |  | 2   |      | 2    | 4     | 6     | 8     |       |
|  |  |     |      |      |       |       |       | 2500h |





# QUANIELLO

www.quaniello.com

